

HARD DRIVE SHREDDING TRUCKS Series 1 Hard Drive Shredders AMS-150HD & AMS-300HD

We require 4-6 weeks to manufacture the equipment followed by a 1-3/4 day installation in a customer provided box truck with a lift gate.



Factory installation includes:

- 3 Phase diesel generator
- Overhead lights
- Louvered ventilation
- Electrical outlets
- Caster brackets
- Generator cover
- Electrical panel
- Fire extinguisher


Electrical Panel



Ventilation



Caster Brackets

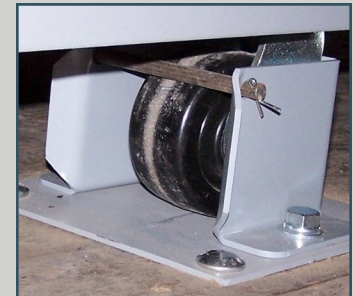

**AMS-150HD & AMS-300HD
HARD DRIVE SHREDDERS**
Compact, Portable & Powerful

Features:

- Choice of shred width
- Viewing window & hour meter
- Choice of powder coat color

Requirements:

- 120v is only available on AMS-150HD with 1.5" shred width. It requires a dedicated 20 amp circuit & reduces throughput by approximately 10%.

SPECIFICATION CHART

Motor	1.5 or 3 HP TEFC
Shred Width	1-1/2 or 3/4"
Infeed	5" W x 2" H
Voltage	120/208/230/460v 1 or 3 Phase
Output	Discharge Bin or Conveyor
Dimensions	45" L x 21" W x 44" H



SPECIFICATIONS

Model Number	Horse Power	Shred Width	Standard Drives / Hour	Server Drives / Hour	Weight (Lbs.)
AMS-150HD	1.5 HP	3/4"	90 - 100	45 - 50	1,400
AMS-150HD	1.5 HP	1.5"	180 - 200	90 - 100	1,300
AMS-300HD	3 HP	3/4"	275 - 300	135 - 150	1,800
AMS-300HD	3 HP	1.5"	550 - 600	275 - 300	1,700

3/4" shred width requires three phase power